

Features

- Designed for 12V agricultural equipment
- 6 Nm, 110 rpm @ output shaft
- Custom versions upon request.
- CANOpen communication (speed and position control)
- Integrated brushless motor drive
- Signalling LED
- 2 digital inputs (e.g. seed sensor or hopper level sensor)
- GORE vent
- **ROJ protocol (54T01166) or Arag protocol (54T01175) or WiFi protocol (54T01176) variants**



Applications


The DMD2 is an application specific brushless motor with integrated planetary gearbox and electronic drive. The motor can be used to replace mechanical or hydraulics transmissions in agricultural or other off-highway applications (e.g. variable rate applications).

Application example are:

- Actuation of seeding element in pneumatic precision planting machines
- Actuation of seed distributor in air-drills or small grain planters
- Actuation of fertilizer and microgranular spreaders in agricultural machines
- Salt, fertilizer, grain spreaders

Overall dimensions

Connector AMP AMPSEAL 1-776267

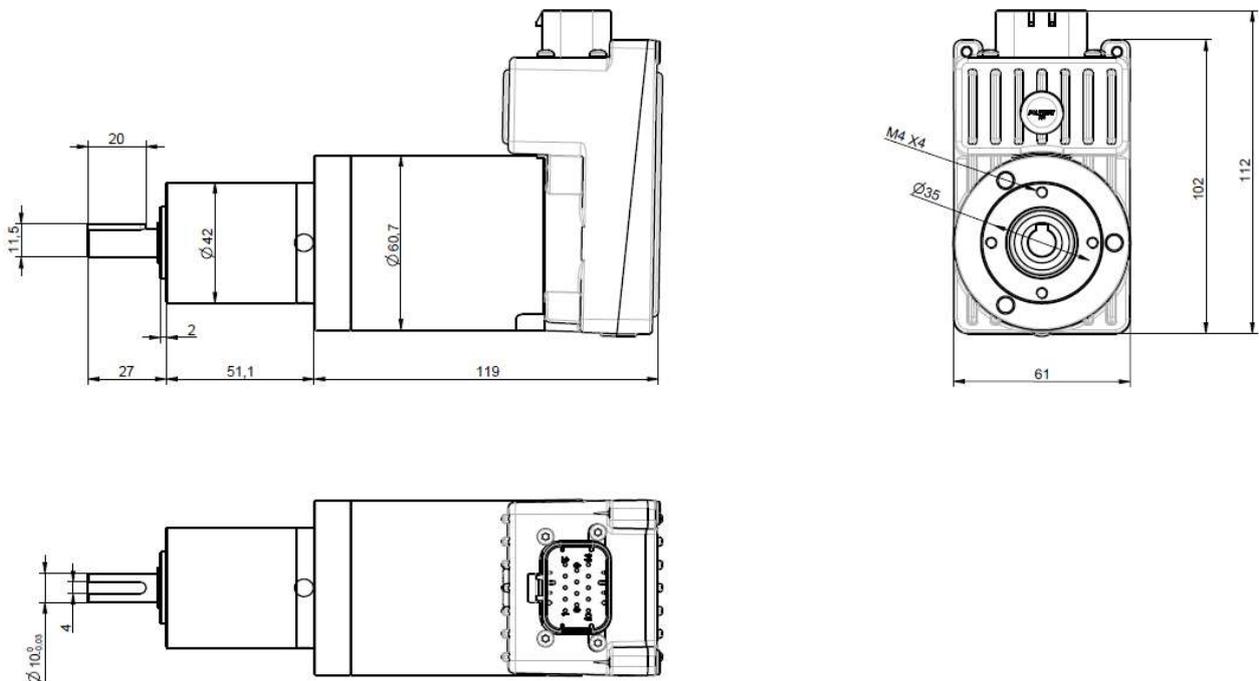

Dimensions in mm.

Mechanical Specifications

| | |
|--------------------------------|--|
| Nominal Torque at output shaft | 6 Nm |
| Peak Torque at output shaft | 9 Nm (single pulse, duration 500ms) |
| Nominal Speed at output shaft | 110 rpm |
| Gear ratio of integrated gear | 1:25.62 axial planetary gear |

Environmental Specifications

| | |
|--------------------------|---|
| Operational Temperature: | -10°C...+55°C (full specs) -10°C...+70°C (derated) |
| Storage Temperature: | -40°C...+80°C |
| IP grade | IP65 excluding the front flange/output shaft. Note: the system integrator shall provide means of protecting those surfaces when integrating the motor into the machine |
| Vibrations | Sinusoidal vibration test: IEC 60068-2-6 Random vibration test: IEC 60068-2-64 Temperature change test: IEC 60068-2-14 Shock test: IEC 60068-2-27 |

Electrical Specifications

| | |
|----------------|--|
| EMC | The unit fulfills EN ISO 14982: 2009 standard (Agricultural and forestry machinery) |
| Supply voltage | 11-16V Note: Voltage is intended at MD connector input pins. Voltage drop due to cable harness shall be taken into account. |
| Supply current | 11 A (at nominal Torque, nominal Speed and minimum supply voltage) |

Input/output and communication

| | |
|---------------------------------|--|
| CAN | 1 CAN bus line (compliant ISO SO 11898-2 and 5. Up to 1 Mbit/s) |
| Sensor interface | 2 x inputs: 3 pins (8V – 80mA supply, GND, signal), up to 2,5 kHz suitable for NPN output sensors. |
| Safety switch input | Contact switch input to remove supply to power stage. |
| Daisy Chain CAN addressing line | Input and output signal for automatic CAN node assignment |

Connector pin-out

Motor connector matches with AMP Ampseal 14 poles, with the following pinning. It matches with connector AMP Ampseal 776273-1.

| | | | | | |
|---|--------------------|---|------------------|----|-----------------|
| 1 | POWER INPUT (+12V) | 6 | CAN_H | 10 | / |
| 2 | GND | 7 | CAN_L | 11 | / |
| 3 | SEED_POWER (+8V) | 8 | MOTOR_ENABLE_OUT | 12 | MOTOR_ENABLE_IN |
| 4 | SEED_POWER (+8V) | 9 | SEED_SENSOR_CNT | 13 | GND |
| 5 | AUX_IN | / | / | 14 | GND |

Safety switch

A safety switch shall be connected to signals MOTOR_ENABLE_IN/ MOTOR_ENABLE_OUT. If the contact is open, the DMD cannot rotate. The safety switch must be implemented using:

- an electro-mechanical switch with “positive opening” NC contact (condition indicated by the symbol \ominus), or
- an electromagnetic sensor with high reliability (e.g. SICK RE11-SA03 or equivalent)
- In order to ensure the requested safety level (Performance Level = c according to EN ISO 13849-1), it is necessary to provide a safety contact with the following characteristics: $B10_d \geq 2 \cdot 10^6$

Note: $B10_d$ is the reliability parameter declared by the device Manufacturer that corresponds to the number of switching operations guaranteed without errors.

Installation

The fastening of motors to the machine, whether they are used for the seeding disc shaft or the fertilizer or micro-granular distributor shaft rotation, must be carried out in order to ensure a perfectly aligned coupling between the disk/distributor shaft and the gear output shaft.



In the absence of a perfect alignment, radial forces may occur on the bearings, causing an increase of the necessary torques and a reduction of the device life.


In order to relieve the bearing stress, an elastic coupling can be used. This one is not supplied with the motor kit and it must be chosen and dimensioned according to the application.

Output shaft axial/radial forces limitations

- Maximum axial load (middle of the key): 305N at n out=100rpm
- Maximum radial load (output shaft center): 890N at n out=100rpm

Orientation limits

It is preferable to mount the DMD2 motor so that the connector is facing downward to prevent stagnation of water over the sealing gaskets.

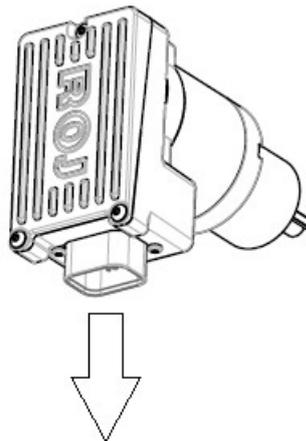

Water ingress protection

Motor has a **IP65** rating, excluding the front flange/output shaft.

Disclaimer

The present specifications are intended to be preliminary. Parameters and values indicated in the document might be subjected to changes. For further information, please contact: mechatronics@roj.com

For more details, please refer to DMD2 Installation, Operation and Maintenance Manual